

スプレー装置対応酸性脱脂液

Acid Cleaner for Spray Device

ICPクリーンR5

ICP CLEAN R5

- 脱脂と一時防錆が同時に処理可能
 - 発泡性が低く、スプレー装置に対応する
 - 表面張力が低い(32.2 mN/m)
- Degreasing and temporary rust-preventing treatment are possible at the same time
● Spray device is available since this product is low foaming type
● Surface tension is low : 32.2 mN/m

優れた脱脂性

Excellent cleaning ability

油性顔料を圧延銅箔にマーク付け

Marked oil-based ink on rolled copper foil



従来浴
Conventional bath



ICPクリーンR5
ICP CLEAN R5

後工程に影響しない一時防錆効果

Temporary rust-preventing effect not to affect a post process cycle

脱脂後、1週間室内放置

Leaving in a room for one week after cleaning



従来浴
Conventional bath




ICPクリーンR5
ICP CLEAN R5

優れた低発泡性 Superior low foaming ability



従来浴
Conventional bath

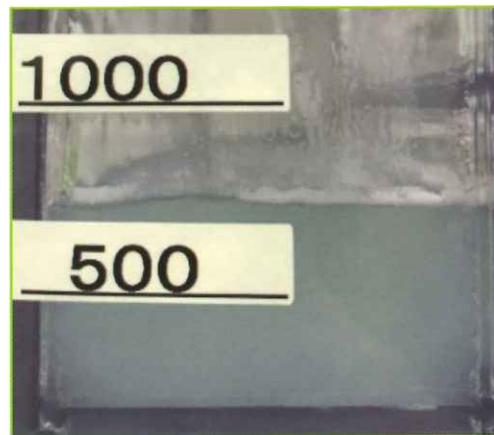

ICPクリーンR5
ICP CLEAN R5